
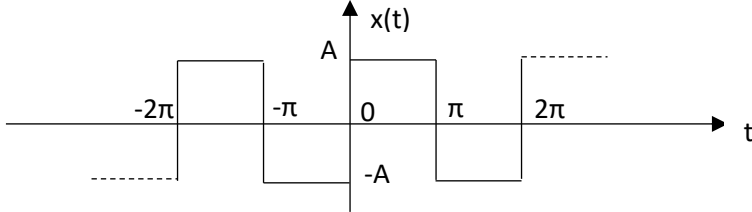


Name:			
Enrolment No:			
UPES End Semester Examination, December 2023			
Course: Signal and Systems Program: B. Tech. (ECE/Mechatronics) Course Code: ECEG2010		Semester: III Time : 03 hrs. Max. Marks: 100	
Instructions: Attempt all the Questions			
SECTION A (5Qx4M=20Marks)			
S. No.		Marks	CO
Q 1	Determine whether the following signals are periodic or not? If they are periodic determine the fundamental period. (a) $x(t) = \cos 2t + \sin \sqrt{3}t$ (b) $x(n) = 1 + e^{j2\pi n/3} - e^{j4\pi n/7}$	4	CO1
Q 2	Estimate the even and odd components of the following signals: (a) $x(t) = \sin 2t + \sin 2t \cos 2t + \cos 2t$ (b) $x(t) = 1 + 2t + 3t^2 + 4t^3$	4	CO1
Q 3	Determine whether the following signals are energy or power signals and calculate their energy or power: $x(t) = Ae^{-at}u(t), \quad a > 0$	4	CO2
Q 4	Find the discrete time Fourier transform of the following sequence: $x(n) = (0.5)^n u(n) + 2^n u(-n - 1)$	4	CO4
Q 5	State and prove the following properties of the Z-transform (a) Time Reversal property (b) Time Expansion property	4	CO4
SECTION B (4Qx10M= 40 Marks)			
Q 6	The system is described by the following equation: $y(t) = atx(t) + bt^2x(t - 2)$ Analyze the following properties of the system: (i) Static or Dynamic (ii) Linear or non-linear	10	CO3

	(iii) Causal or non-causal (iv) Time-invariant or time-variant		
Q 7	Find the Fourier transform of the following signals: (a) $x(t) = e^{-a t } \text{sgn}(t)$ (b) $x(t) = \begin{cases} 1 + \cos\pi t, & t < 1 \\ 0 & , t > 1 \end{cases}$	10	CO2
Q 8	Determine the trigonometric Fourier series for the waveform shown in figure 1.  <p style="text-align: center;">Figure 1</p>	10	CO4
Q 9	A signal $x(t) = 2\cos 400\pi t + 6\cos 640\pi t$ is ideally sampled at $f_s = 500\text{Hz}$. If the sampled signal is passed through an ideal low pass filter with a cutoff frequency of 400Hz, what frequency components will appear in the output? Sketch the output spectrum and also find the output signal.	10	CO2
SECTION-C (2Qx20M=40 Marks)			
Q 10	(a) The impulse response of a LTI system is $h(n) = \{1, 2, 1, -2\}$. Find the response of the system for the input $x(n) = \{1, 3, 2, 1\}$. (b) Determine the convolution of the following signals using discrete time Fourier transform. $x_1(n) = \left(\frac{1}{2}\right)^n u(n)$ $x_2(n) = \left(\frac{1}{3}\right)^n u(n)$	20	CO3
Q 11	(a) A causal LTI system is described by the difference equation $y(n] = y(n - 1) + y(n - 2) + x(n) + 2x(n - 1)$ Determine the system function and frequency response of the system. Plot the poles and zeros and indicate the ROC. Also estimate the stability and impulse response of the system. (b) Determine the inverse Z-transform of the following using residue method. $X(z) = \frac{1 + 2z^{-1}}{1 + 4z^{-1} + 3z^{-2}}; \text{ROC}; z > 3$	20	CO4